


Supersonic
551000



The Supersonic SS1000 implements all technological features which will dominate the multimedia-market for the upcoming decade due to an integrated media-streamer with Smart-TV-, Bluetooth™-, USB™- and Airplay™- Interface the SS1000 can be combined with any state of the art media-device.

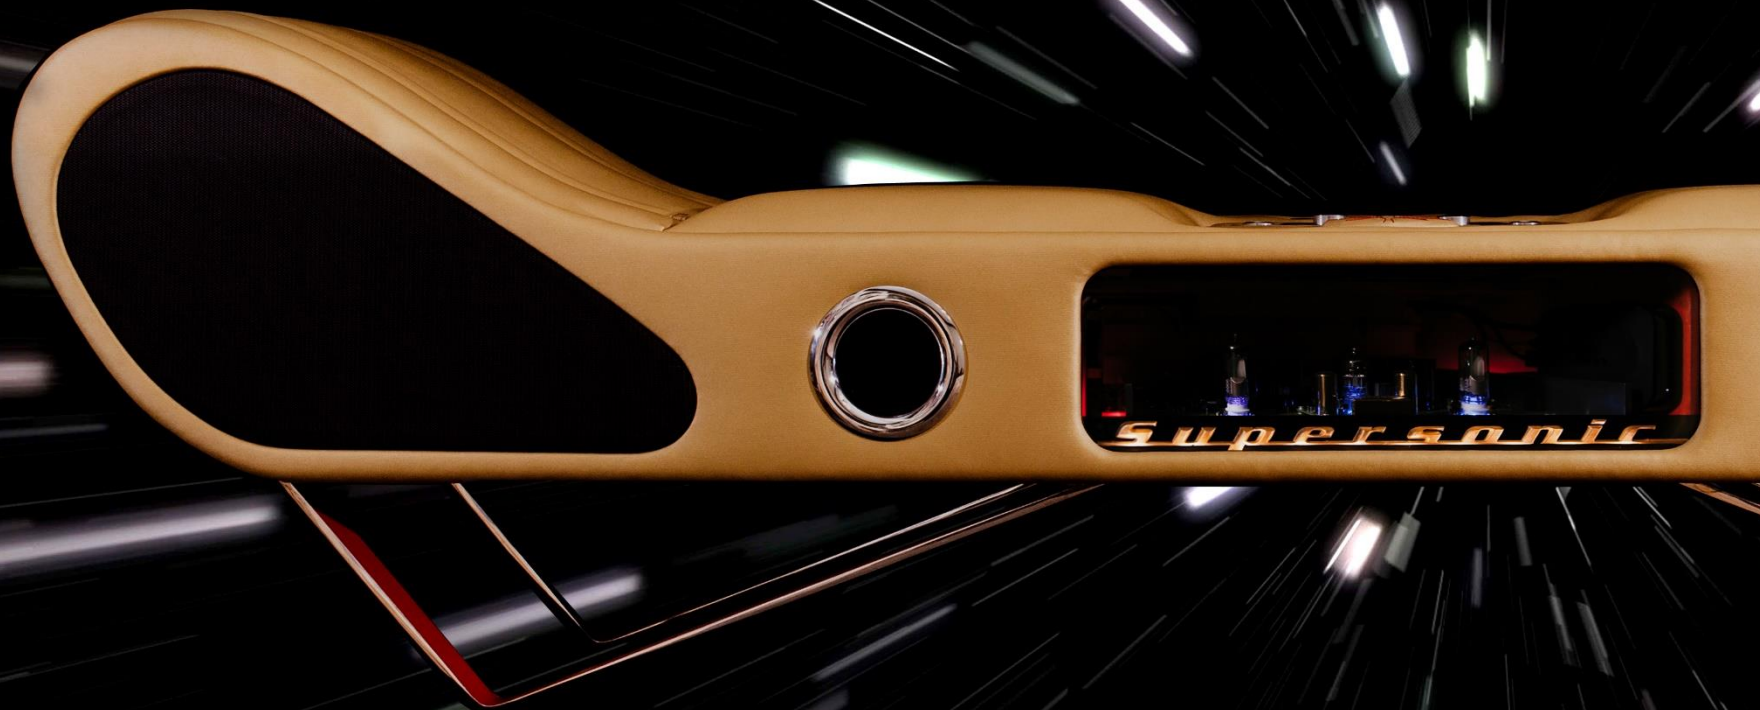

The unique hybrid power-amplifier of the SS1000 is a masterpiece of engineering which combines the best features of electron-tube technology and modern microelectronics. It delivers an immense continuous power output. Even when you do not necessarily need it all the time – but it is good to know that you have.



BACK TO THE FUTURE!

The Supersonic flagship has arrived from the golden music-furniture era of the last century and sets completely new standards. *This hand-made genuine product and timeless design has a high-end sound quality that blends into over the top art work.*



The concept for the SS1000 was created in cooperation with the design-label Gatto Vienna. It is built completely in-house where sophisticated craftsmanship meet the most up to date technology. It comes with several design elements as well as the exclusive leather upholstery that is adaptable in consultation with our clients to create a unique and customized product.



PHYSICAL PROPERTIES & POWER SUPPLY

Dimensions: 220cm x 60cm x 40cm (L|H|D). Weight: 150kg
Supply voltage: 230VAC / 50Hz.

SALES INFORMATION

The SS1000 is manufactured and assembled by hand. Production time is about 3 months. Price on request. Do not hesitate to contact us to get your personal offer.

Supersonic Vienna © 2017

www.supersonic.at | info@supersonic.at

Mommsengasse 13 | 1040 Vienna | Austria | Phone: +43 660 65 48 123

All trademarks and registered trademarks belong to their respective owners.

TECHNICAL DATA

MEDIA INTERFACE

Integrated media streamer (e.g. Apple-TV©)

AMPLIFIER

Symmetrical hybrid amplifier with 324Watts continuous power output into 8ohms load. ECC88 based pre-amplifier stage with two EM84 YU level indicators.

AUDIO PROCESSING

Digital audio signals are processed by a high quality 24BIT digital to analogue converter at a sample rate of 44.1kHz.

LOUDSPEAKERS

Beyma© 10 CX 300/FE coaxial drivers in super-linear bass-reflex configuration.

INTERFACES

HDMI-Smart-TV-Interface

Bluetooth™4.00 Audio Interface (AAC/MP3/SBC/APTX)

Apple-Airplay™ Interface

USB™ Audio Interface

USB™ Smartphone charging Interface

Analog- Stereo Audio Input